Features:
1. 01~05 circuits available;
2. Material:PA66+30%GF 94V-0;
3. Contact:Phosphor Bronze;
4. Finished:Tin-plated or Gold-Flash;
5. Mates with H7920S12 Housing,
6. Coloe:Black/Natural/Red

Specification:

NO. of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30 A	25 A	20 A	15 A
2	25 A	20 A	18 A	15 A
3	25 A	20 A	18 A	15 A
4	22 A	18 A	15 A	13 A
5	22 A	18 A	15 A	13 A

Current rating:30A AC/DC.
Voltage rating:600V AC(RMS) or 600V DC Max.
Contact resistance: 5mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:2500V AC/minute.
Ambient temperature rang:-35°C~90°C.

H7920S13-XX-XX-XX


SERIES NO:


PIN Q'PY:
01~05


Color:
CW-White
CB-Black
CR-Red


PLATING:
0T-Tin-plated
G1-G/F(ALL) 1U"

1 Pos.

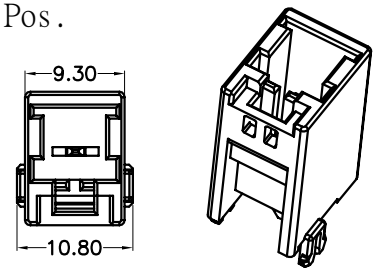






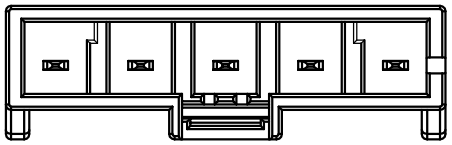



Guide Key : Inside Color : White

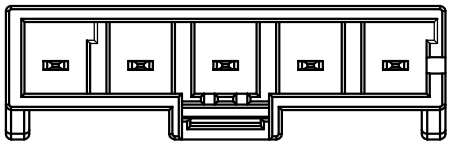



Guide Key : Left Side, Color : Red


2 to 5 Pos

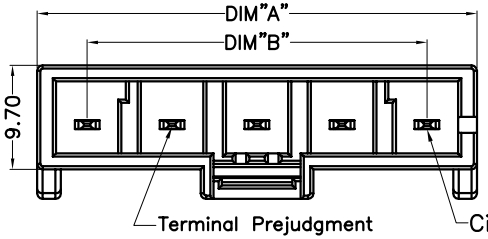


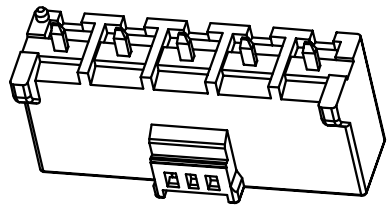

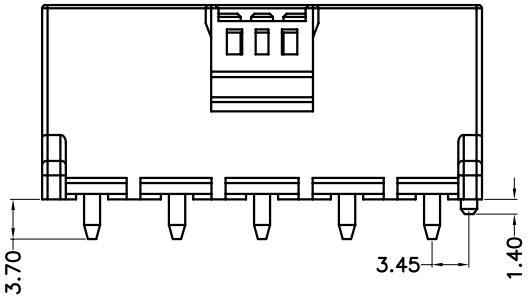




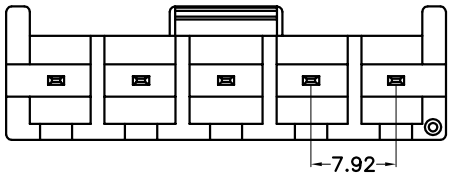




PCB 1 Pos

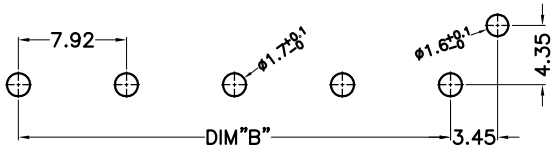

PCB 2 to 5 Pos

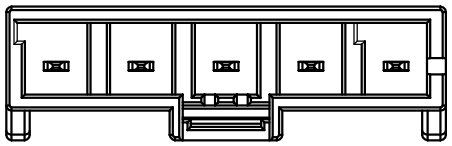

Guide Key : Right Side Color : Black

Dimensional Information(mm)

No. of Contacts	DIM A	DIM B
1		
2	17.22	7.92
3	25.14	15.84
4	33.06	23.76
5	40.98	31.68

REV	Description	DATE	GENERAL TOLERANCES (unless specified)	UNITS	MM	DATE	2021-10-21	东莞市恒创连接器有限公司 DONG GUAN HENG CHUANG CONNECTOR COMPANY LIMITED	
A	新版发行	2021-10-21	X.X±0.4	SCALE	1:1	DRAWING	Liu zhi guo		
B	增加端子说明	2022-07-29	X.XX±0.25	REV	A	CHECKED BY	Li peng	PRODUCT NAME	7.92 mm vertical header
			X.XXX±0.15			APPROVAL BY	OYSW	RART NUMBER	H7920S13-XX-XX-XX