Features:

1. 01~05 circuits available;
2. Material:Nylon 66 UL 94V-0;
3. Accepts H7920S11 terminal;
4. Mates with H7920S13 H7920S14 header;
5. Coloe:Black/Natural/Red

Specification:

NO. of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30 A	25 A	20 A	15 A
2	25 A	20 A	18 A	15 A
3	25 A	20 A	18 A	15 A
4	22 A	18 A	15 A	13 A
5	22 A	18 A	15 A	13 A

Current rating:30A AC/DC.

Voltage rating:600V AC(RMS) or 600V DC Max.

Contact resistance: 5mΩ Max.

Insulation resistance:1000MΩ Min.

Withstanding voltage:2500V AC/minute.

Ambient temperature rang:-35°C~90°C.

Dimensional Information(mm)


No. of Contacts	DIM A	DIM B
1	8.00	
2	15.50	7.92
3	23.42	15.84
4	31.34	23.76
5	39.26	31.68


H7920S12-XX-XX


SERIES NO:


PIN Q'PY:
01~05


Color:
CW-White
CB-Black
CR-Red

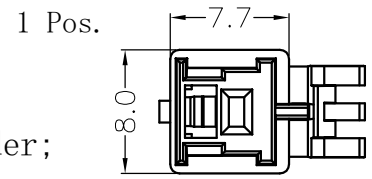


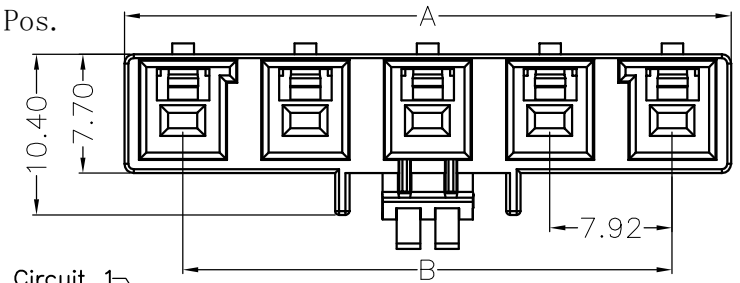







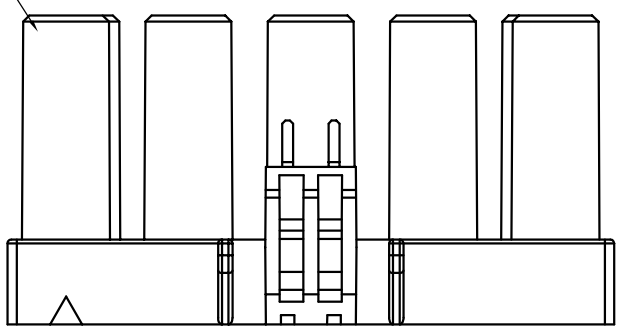

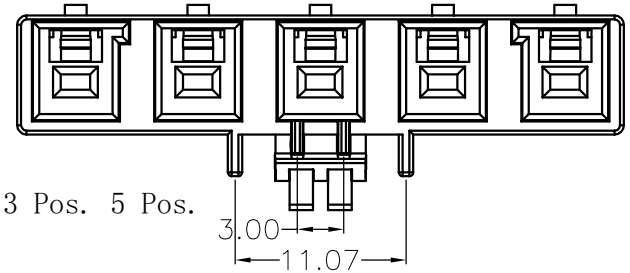


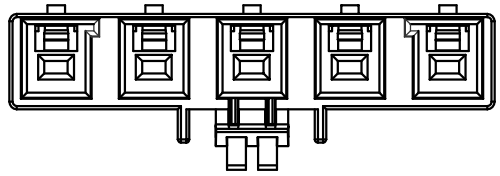


Guide Key : Inside Color : White

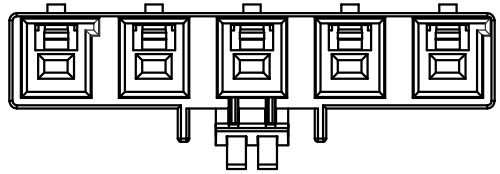

Guide Key : Right Side Color : Black

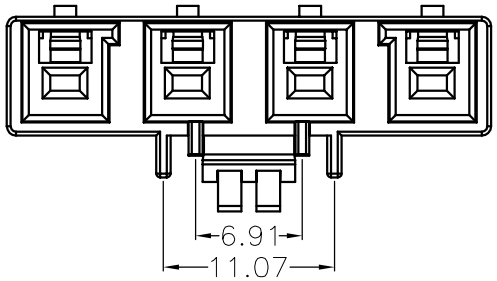

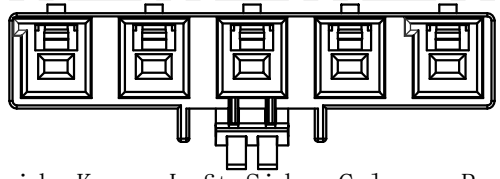

Guide Key : Left Side, Color : Red

REV	Description	DATE	GENERAL TOLERANCES (unless specified)	UNITS	MM	DATE	2021-10-21	东莞市恒创连接器有限公司 DONG GUAN SHI HENG CHUANG CONNECTOR COMPANY LIMITED	
A	新版发行	2021-10-21	X.X±0.4	SCALE	1:1	DRAWING	Liu zhi guo		
			X.XX±0.25	REV	A	CHECKED BY	Li peng	PRODUCT NAME	7.92 mm wire to Board housing
			X.XXX±0.15			APPROVAL BY	OYSW	RART NUMBER	H7920S12-XX-XX


Features:

1. Material:Phosphor bronze;
2. Finished:Tin-plated over nickel or G/F 0.8U";
3. Used in H7920S12-XX housing;
4. Wire range:#10~#16 AWG.

Specification:


NO. of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30 A	25 A	20 A	15 A
2	25 A	20 A	18 A	15 A
3	25 A	20 A	18 A	15 A
4	22 A	18 A	15 A	13 A
5	22 A	18 A	15 A	13 A


Current rating:30A AC/DC.
Voltage rating:600V AC(RMS) or 600V DC Max.
Contact resistance: 5mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:2500VAC/minute.
Ambient temperature rang:-35°C~90°C.

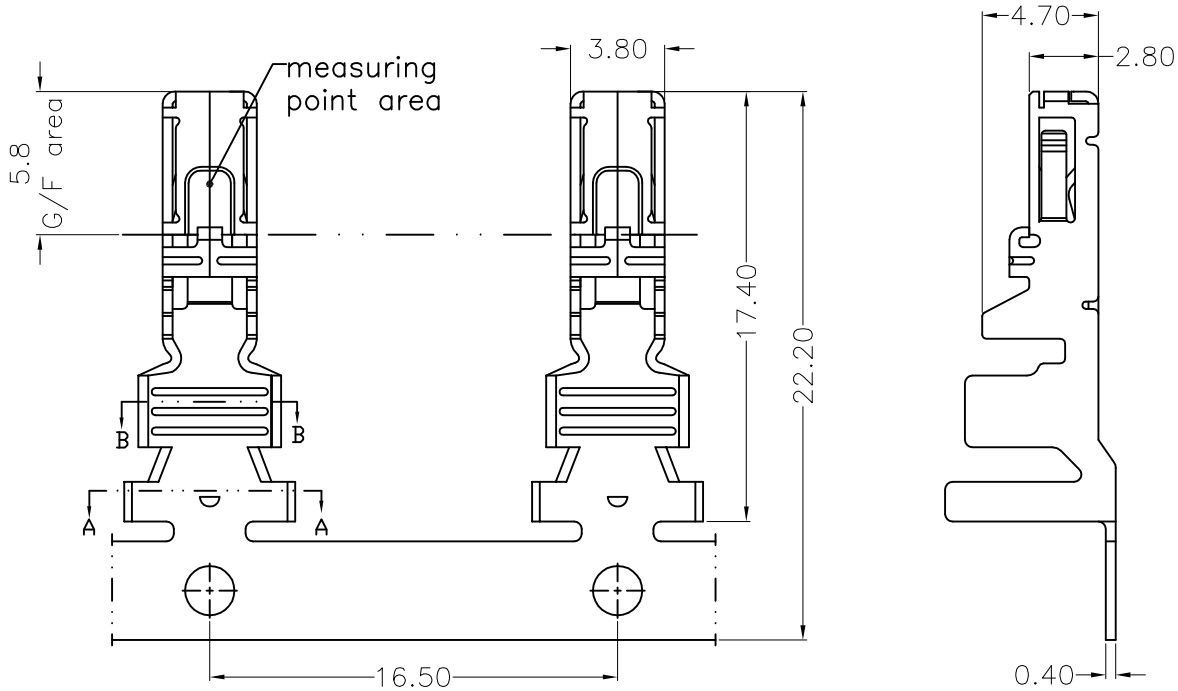

Ordering Information

Part NO	Wire range	DIM A	DIM B	DIM C	DIM D
01	#14~#16	4.40	5.20	3.90	4.00
02	#10~#12	7.00	6.80	6.80	5.60





H7920S11-XX-XX

SERIES NO:

Wire range:
01:#14~#16
02:#10~#12

PLATING:
0T-Tin-plated
G0-G/F 0.8U"

REV	Description	DATE	GENERAL TOLERANCES (unless specified)	UNITS	MM	DATE	2021-10-21	东莞市恒创连接器有限公司 DONG GUAN SHI HENG CHUANG CONNECTOR COMPANY LIMITED	
A	新版发行	2021-10-21	X.X±0.4	SCALE	1:1	DRAWING	Liu zhi guo		
B	增加镀区域说明	2022-07-29	X.XX±0.25	REV	A	CHECKED BY	Li peng	PRODUCT NAME	7.92 mm wire to Board Terminal
			X.XXX±0.15			APPROVAL BY	OYSW	RART NUMBER	H7920S11-XX